


The Series 200 make up an integrated system of hinges developed to provide a solution to any situation involving concealed hinges.


Bright nickel plated steel cup and arm.

Dimensions of the Ø 35 mm cup.

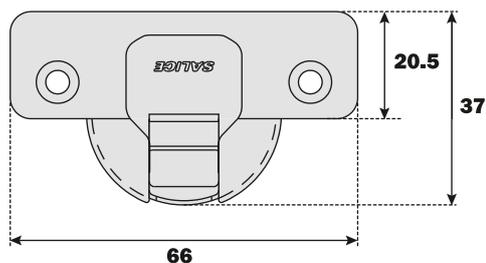

Constant "L" value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

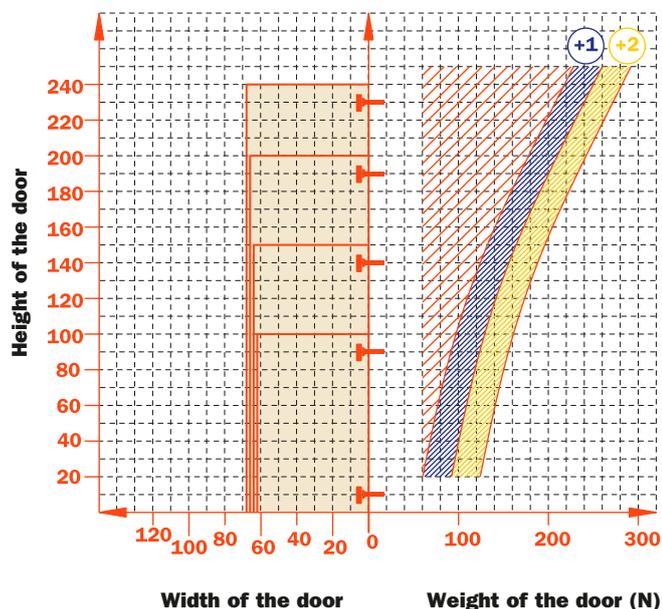

Adjustments

Compensating side adjustment from -1.5 mm to +4.5 mm.
 Height adjustment ± 2 mm.
 Depth adjustment with Series 200 mounting plates +2.8 mm.
 Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.
 Anti-sliding safety stop.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
 Snap-on assembly on Domi mounting plates.
 Positioning with pre-determined stop on traditional Series 200 mounting plates.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.


Drillings and fixings

	94° 110° 120° 155° 165°	94° 110° 120° 155° 165°	94° 110° 120° 155° 165°	
Wood screw		A A A A	P P P P	U U U U
	94° 110° 120° 155° 165°	94° 110° 120° 155° 165°	94° 110° 120° 155° 165°	
Rapido		6 6 6 6	7 7 7 7	2 2 2 2
Dowel		B B B B	R R R R	W W W W
Logica		I I I I	J J J J	Q Q Q Q

Use this table to identify the available drillings and fixings.

Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C2_BA99.

↑
Fill this position with the chosen letter or number.

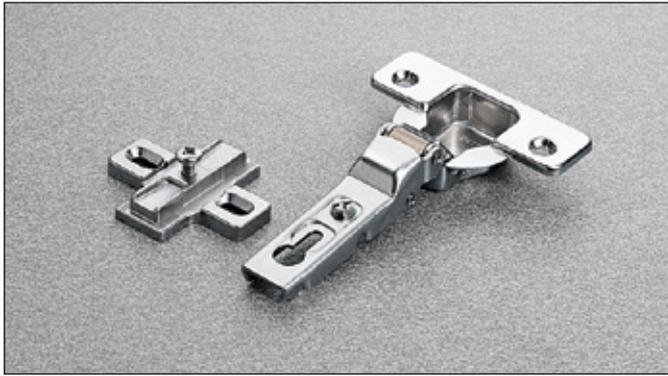

Technical information

Hinges for fridge doors.

11 mm deep metal cup.

94° opening.

Possible drilling distance on the door (K): from 3 to 9 mm.

Compatible with all traditional Series 200 mounting plates.


NOT COMPATIBLE with Domi snap-on mounting plates.

Packing


Boxes 150 pcs.

Pallets 3.600 pcs.

Use the tables "Drillings and fixings" at page 83 to complete the code number of the desired hinge.

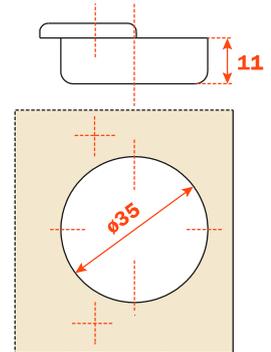

CA sprung hinge

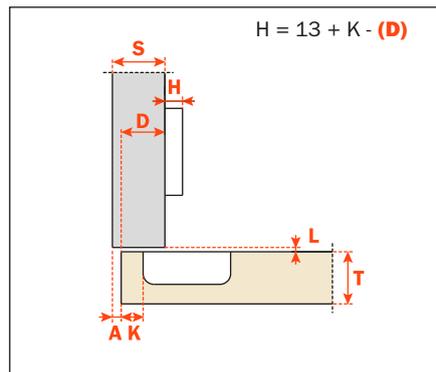

CA - C2_BF99

